


VXI
blueparrott
BLUEPARROTT B200
Controls & Components



Microphone volume adjustment
(located under base)

The headset battery charges continuously while the headset is in the base.

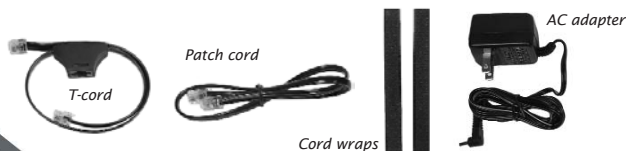

Installation A

For phones *without* headset ports



1. Remove handset cord from phone's base.
2. Plug short end of T-cord into now empty handset port on phone.
3. Plug longer end of T-cord into port on B200 base marked "Phone". Thread cord under hook.
4. Plug handset cord into port on T-cord.
5. Plug AC adapter into port on B200 base marked and then plug AC adapter into a standard 110V electrical outlet.

Installation B

For phones *with* headset ports
(Cisco phones see Installation C)



1. Leave handset plugged into your phone.
2. Plug short end of T-cord into headset port on phone.
3. Plug longer end of T-cord into port on B200 base marked "Phone". Thread cord under hook.
4. Plug AC adapter into port on B200 base marked and then plug AC adapter into a standard 110V electrical outlet.

Installation C

For Cisco models 7940 or higher with a headset port




1. Leave handset plugged into your phone.
2. Plug the blue-banded end of the patch cord into the headset port on your phone.
3. Plug other end of the patch cord into port on the B200 base marked "Phone". Thread cord under hook.
4. Plug AC adapter into port on B200 base marked and then plug AC adapter into a standard 110V electrical outlet.

BASIC OPERATION

Charge headset in base for 12 hours before first operation. The multifunction button on the headset will turn green when fully charged. After use, this light will turn red. It is not necessary for the light to turn green to use the headset. Talk time on a full charge equals 6 hours. Please consult user guide for information about low battery indicators.

Microphone Adjustment

To ensure proper microphone performance, do the following.



1. The microphone has the word TALK or a dot printed or embossed on it (under the cushion). This mark must face your mouth.
2. For quality sound and effective background noise cancellation, position microphone a finger's width away from your face just below your bottom lip. The microphone is sensitive, minor adjustments may be needed to achieve optimum voice quality.


Standby Mode

The headset is automatically in standby mode when you remove it from the base, therefore it is ready to interact with the phone. After removing the headset from the base, a yellow flashing light on the headset indicates that Standby Mode is active. If the yellow light is not flashing, turn the headset on (see User Guide). Standby time is up to 100 hours on a full charge.




B200 Bluetooth® Wireless Headset
for Office Phone Systems

Make/End A Call Make sure the headset is in Standby Mode (see above).


1. Put the headset on and position the microphone properly.
2. Activate the headset*: Firmly press and release the multifunction button on the headset for 1 second. You will hear a beep. The headset icon  will light up on the right side of the base indicating that the headset is active. Activate your phone by removing the handset from the cradle or by pressing the line or headset button. If the dial tone is too loud when you activate your phone, you can press the volume decrease button 1-3 times before activating the headset.
3. Dial as usual.
4. To end the call, place the handset back in cradle, or press the line or headset button on the phone to end the call.

** If the headset icon is already showing on the front of the base, then the headset is already active and you may simply activate the phone and dial as usual.*



Adjust the Microphone Volume - The Microphone Volume Adjustment is located on the bottom of the B200 base. If the person on the other end of the call is having trouble hearing you, position the base as shown and turn the knob clockwise to increase the volume. If your voice is too loud, turn the knob counterclockwise to decrease volume.

Answer/End A Call - Make sure the headset is in Standby Mode (see above).

1. If the headset is not on your head, put it on and position the microphone properly.
 2. Activate the headset*: Firmly press the multifunction button on headset for 1 second, then release. The headset icon  will light up on the right, front side of the base.
- * If the headset icon is already showing on the front of the base, then the headset is already active and you may simply activate the phone as usual (step 3).*
3. Remove handset from cradle or press the line or headset button. You will be connected to the call.

4. To end the call, place the handset back in cradle, or press the line or headset button on the phone to end the call.

Adjust Speaker Volume

To adjust the volume in your earpiece, press the increase or decrease volume button for 1 second, then release. Repeat until volume is at desired level. You will hear a single beep each time you press the button.

VISUAL AND AUDIO INDICATORS EXPLAINED

Headset Indicator Lights (While In Base)		Headset Indicator Lights (While Off Base)	
No lights	Headset not receiving charge	Yellow flashing	In Standby Mode
Green light	Full charge / Okay to use	Red light flashes every few seconds	Low battery warning
Red light	Normal charging mode / (partially charged) Okay to use	Red and yellow lights flash alternately and then stop	Pairing successful
Headset Audio Indicators		Base Unit Indicator Lights	
3 beeps that descend in tone	Headset off (end Standby Mode)	Headset icon lit up on left, front side of base	Headset is active. Calls will be directed to the headset.
3 beeps that ascend in tone	Headset on (in Standby Mode)	Handset icon lit up on left, front side of base	Handset side is active. Calls will be directed to the handset.
1 single beep	Follows press of multifunction button to activate headset. Also follows volume adjustments and mute/unmute activation	Yellow flashing	Standby Mode
1 beep every few seconds	Headset microphone is muted	Red and yellow lights flash alternately and then stop	Pairing successful
Double beep every 30 seconds	Low battery warning	No lights	Unit not receiving power



VXI A brand of VXI Corporation
One Front Street. Rollinsford, NH 03869
800-742-8588 | 603-742-2888
PN201955A